


Specification Sheet

DAK-ROCK HEAVY | GROUND PAVING GRID





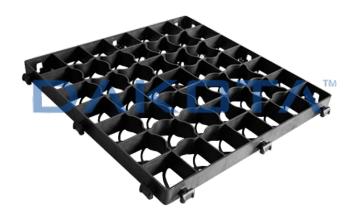







Code	Commercial Description	Dimensions	Conf.	Pallet	Selling Unit
GAR01-0022N	Dak-Rock Heavy Ground Paving Grid - Black	h. 39 - 500 x 500	0	288	PZ
GAR01-0022GV	Dak-Rock Heavy Ground Paving Grid - Green	h. 39 - 500 x 500	0	288	PZ

Description

Dak-Rock Heavy is a ground reinforcement paving solution designed to improve natural water drainage and at the same time to prevent ground erosion. It is a perfect alternative to sett bricks paving, flagstone, openwork paving slabs and different kind of concrete based surfaces. Innovative interlocking system enables to connect the panels and create a continuous surface, which become completely invisible once filled with aggregate or grass, preserving the natural character of the area.

Material

Made of recycled PP (polypropylene)

Use

Each grid has a click interlocking system on aside, in order to connect the panels and to create a continuous surface, which become completely invisible once filled with aggregate, gravels or grass. The interlocking system is strongin order to guarantee a perfect connection and stability on the entire surface. In case of unfastening of some grids, you need a tools that acts as a lever, such as a common flat head screwdriver. The process is very simple: Insert the screwdriver in the locking system between the panels; Once fully



inserted between the clip and the fixed slotPush in order to open the clip and disconnect it, in order to lift up the grid and remove it.