DAKOTA TECHNICAL DATA SHEET Rev: 13 January, 2023

UNIVERSAL CLIP FOR LATERAL LAYING



INDICE


- 1. Code registry
- 2. Description
- 3. Use
- 4. Technical specification


1. CODE REGISTRY


| | Measures (mm) | Weight (g/pz.) | Pkg. / Pallet |
|---|---------------|----------------|---------------------|
| TER09-1146/A Universal clip for lateral laying | - | 38 | 100 pc. / 7.000 pc. |
| TER09-1146/AP Universal clip for lateral laying in PP | - | 5 | 200 pc / 7.000 pc |

MATERIAL Made of stainless steel or in PP.












OUTDOOR

This data sheet supersedes and replaces all previous ones. The information contained herein is accurate to our present knowledge. Dakota Group S.a.S. assumes no responsibility or liability with respect to the information given. Dakota Group S.a.S. reserves the right to change speci cations and models without prior notice. Dakota Group S.a.S. - Via Don Cesare Scala, 55 - Brentino Belluno (VR) - Italy - tel. 045-6284080 - fax. 045-6284075 www.dakota.eu - info@dakota.eu o u cio.tecnico@dakota.eu



UNIVERSAL CLIP FOR LATERAL LAYING

TER09-1146/AP

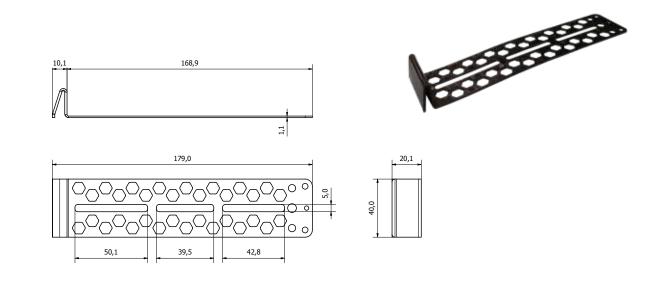

2. DESCRIPTION

Universal clip for the perimeter laying of tiles for floating floors.

The clip avoides the contact between the tiles and the wall, thanks to its special shape that absorbs all possible movements and dilatations. Specifically designed to be used with these Dakota Supports: **ARKIMEDE, 3D-Scopic, Hercules and Level Up.**

3. USE

Used for laying of perimeter tiles with Dakota raised floor supports.

4. TECHNICAL SPECIFICATION

| Item | Description | Unit | Price |
|---------------------|---|------|-------|
| Dak.D. TER09-1146/x | Supply and installation of universal clip for the perimeter laying of tiles for floating floors. The clip avoides the contact between the tiles and the wall, thanks to its special shape that absorbs all possible movements and dilatations. Specifically designed to be used with these Dakota Supports: ARKIMEDE, 3D-Scopic, Hercules and Level Up. . Made of stainless steel or in PP. Used for laying of perimeter tiles with Dakota raised floor supports. | pc. | - |



pag. 2/2